

Original Directflo® Technology


DF30 & DF30T PLASTIC PUMPS

Air operated double diaphragm pumps for dosing, spraying, transferring and distributing a wide variety of fluids in small flow rates applications.

Pump wetted parts are compatible even with the most aggressive fluids and are suitable for use in corrosive environments. Air motor (directional air valve and air chamber covers) is made of polypropylene.

DF30T are dual inlet pumps for 1:1 ratio mixing of fluids with similar viscosity. Both, the initial fluids and the resulting mixture, must be compatible with the pump's wetted materials.

Fully groundable ATEX certified pumps are available for use in potentially explosive atmospheres (Ex II2 GD IIB/IIC 95 °C).



Orientable air inlet, increased installation flexibility.

1/2"
38 l/min
10 US gal/min



Ex ATEX certified versions available
Ex II2 GD IIB/IIC 95 °C

RECOMMENDED MODELS


MODEL	PUMP BODY	DIAPHRAGMS	BALLS	SEATS	OTHER WETTED MATERIALS	RECOMMENDED APPLICATIONS
DF30PPSESTMBAS	Polypropylene	Santoprene®	PTFE	Stainless Steel	EPDM	Water based fluids, coatings and adhesives, diluted mild alkalis and acids, alcohols.
DF30PPSVSTHBAS	Polypropylene	TPE	PTFE	Stainless Steel	FKM	Water and some aqueous chemicals. General application pump for lubricants.
DF30PPYTWTBAS	Polypropylene	PTFE	PTFE	PVDF	Hastelloy® C	Wide compatibility, including acids and alkalis for water treatment and CIPs chlorinated cleaning agents for home & industrial cleaning processes.
DF30PPSTSTTBAS	Polypropylene	PTFE	PTFE	Stainless Steel	-	Wide chemical compatibility.
DF30PKYTWTBAS	Conductive PVDF	PTFE	PTFE	PVDF	Hastelloy® C	ATEX pump. Strong acids (some above room temperature) and alkalis. Not recommended for some strong alkalis or concentrated nitric acid. Ex
DF30PDSTSTTBAS	Conductive Acetal	PTFE	PTFE	Stainless Steel	-	ATEX pump. Solvents (most ketones, acetates, aldehydes, aromatic and chlorinated hydrocarbons, toluene) and solvents based inks, paints and varnishes. Ex

DF30 & DF30T PLASTIC PUMPS

TECHNICAL DATA

Pressure ratio	1:1
Maximum free delivery (1)	38 l/min (10 US gal/min)
Delivery per stroke approx. (1)	0,07 litres (0.02 US gal)
Delivery per cycle (2 x strokes) (1)	0,14 litres (0.04 US gal)
Air pressure operating range	1,5 to 8 bar (22 to 115 psi)
Solids in suspension max. size	3 mm (1/8")
Maximum dry suction lift (1)	4 m (13')
Maximum wet suction lift (1)	8 m (26')
Weight	1,9 kg (4.19 lb)
Fluid inlet connection	1/2" BSP/NPT (F) 2 x 3/8" BSP/NPT (F) (DF30T)
Fluid outlet connection	1/2" BSP/NPT (F)
Air inlet connection	3/8" NPSM (F)
Wetted part materials	See recommended models


(1) Data measured with water, air inlet pressure 7 bar (100 psi), 20 °C (68 °F).

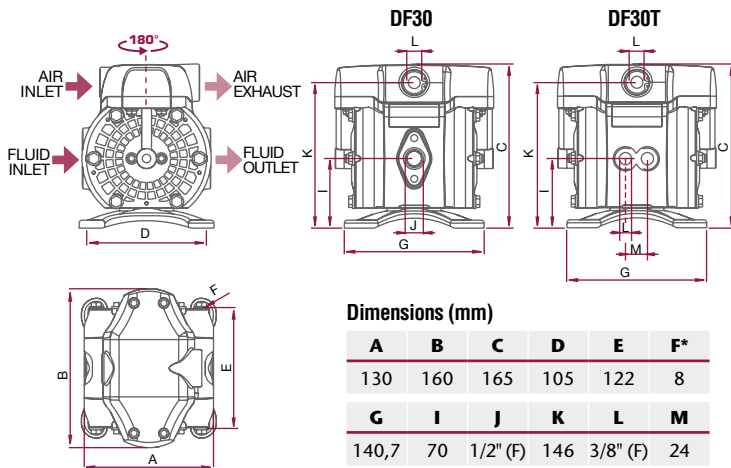

* Diameter of the holes for fasteners in each of the four pump feet.

PERFORMANCE CURVES

Tested at room temperature, with water and flooded pump with 800 mm (31 1/2") height of water above the pump inlet.

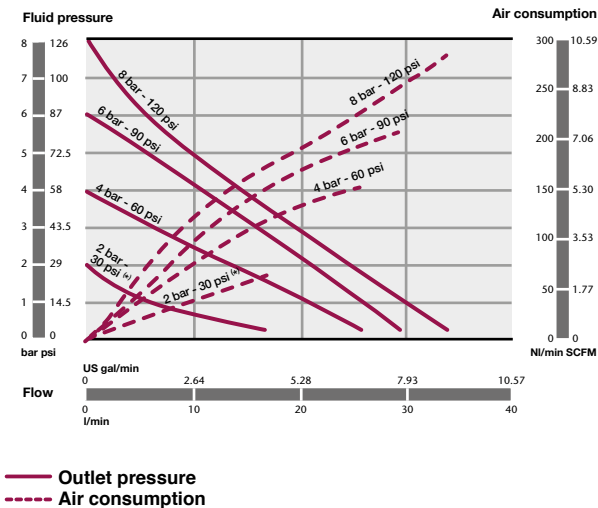

(*) 2 bar test with a PTFE (Teflon®) diaphragms pump.

DF30 & DF30T PLASTIC PUMP CODING SYSTEM

1	2	3	4	5	6	7	8	9	10
DF30	P	P	S	E	S	T	M	B	AS

1 PUMP SIZE

DF30
DF30T (Dual inlet)

7 CHECK VALVE BALLS

T = PTFE (Teflon®)
C = Acetal
S = Stainless Steel AISI 316

2 AIR MOTOR: DIRECTIONAL VALVE & AIR CHAMBER COVERS

P = Polypropylene

8 DIAPHRAGMS

T = PTFE (Teflon®)
M = Santoprene®
H = TPE (Hytrel®)

3 WETTED PUMP BODY

P = Polypropylene
B = Conductive Polypropylene (ATEX pump)
D = Conductive Acetal (ATEX pump)
W = PVDF *
K = Conductive PVDF (ATEX pump) *

9 FLUID CONNECTION THREADS

B = BSP
N = NPT

4 PUSH ROD

S = Stainless Steel AISI 420
Y = Hastelloy® C *

5 SEALS

V = FKM (Viton®)
E = EPDM
T = PTFE (Teflon®)

10 OPTIONS

AS = Standard pump
BS = Remote air exhaust
ES = Externally driven
FS = Extra muffler
US = Special UV Ink pump
GS = NPN inductive external pump control sensor
IS = ATEX inductive external pump control sensor
JS = PNP inductive external pump control sensor

6 CHECK VALVE SEATS

S = Stainless Steel AISI 316
W = PVDF *

(*) Not for DF30T pumps

